




MACSCOTT BOND LTD

Fluid Power Engineers

A Member of the MacTaggart Scott Group

HIL1004

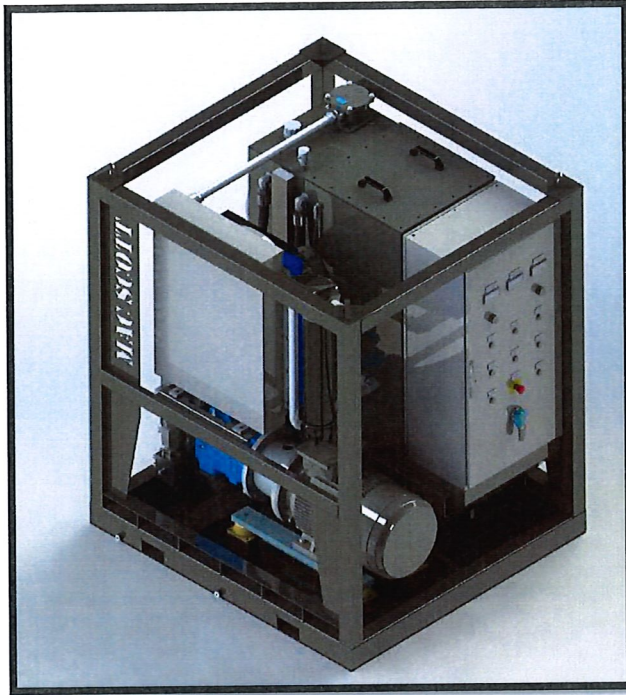

Flushing Rig

Flows: 60 – 300LPM*

Weight: 2,500kg

L=1650mm

W=1500mm

H=1950mm

(*Ambient temperature 12°C, ISO VG32)

Features:

- 30KW 400V / 3ph / 50Hz ELECTRIC MOTOR
- Damping Feet to reduce noise of the pump.
- Remote Pressure Controlled Pump
- Pump Safety Block
- 6 μ m Pressure Filter W. Indicator
- 6 μ m Return Filter W. Indicator
- HPV Oil Cooler
- Pressure, Temperature, & Level Sensor
- Digital Displays (Temperature, Pressure, & Flow)
- In-Line Particle Counter
- All Internal Pipework Stainless Steel
- Mild Steel Lifting Frame Load Tested To 2,500kg
- 1000l Stainless Steel Tank
- VSD Control
- Potentiometer for Flow Control
- Potentiometer for Pressure Control
- Low Level Cut-Off
- High Temperature Cut-Off
- Cooler Control